


LEGEND

- = ITEM 202 - WALK REMOVED
- = ITEM 202 - PAVEMENT REMOVED (CONCRETE DRIVE)
- = ITEM 202 - PAVEMENT REMOVED (ASPHALT DRIVE)
- = ITEM 202 - PAVEMENT REMOVED (GRAVEL DRIVE)
- = REMOVE EXISTING TREE

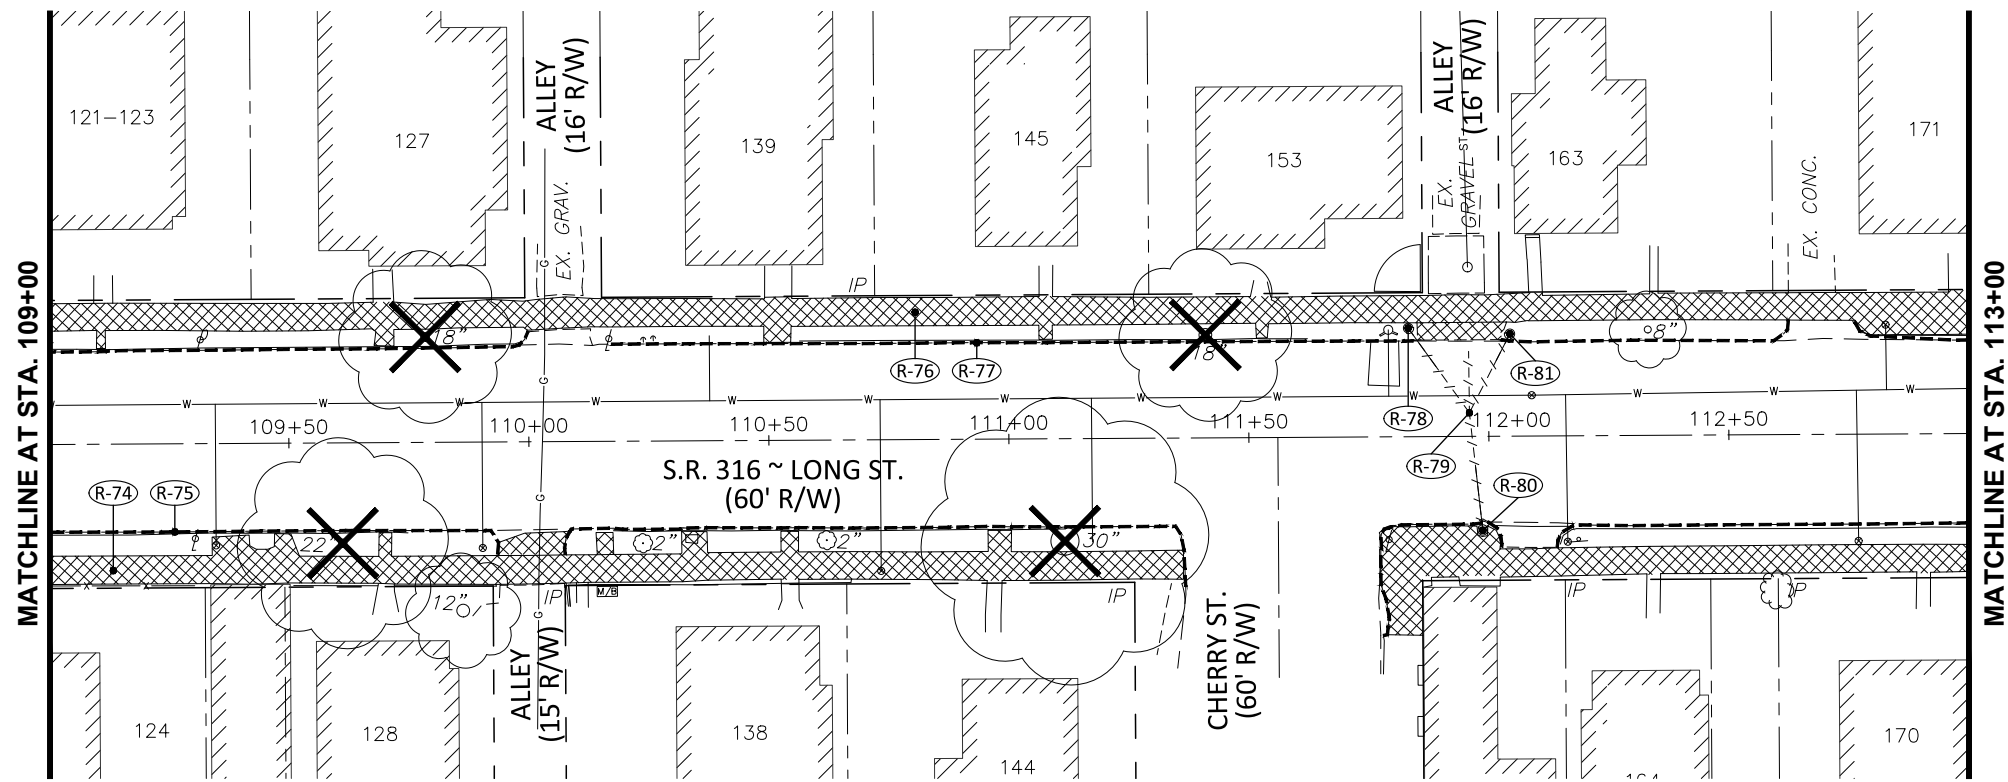

| REF NO. | STATION TO STATION | SIDE | ITEM | UNIT | QUANTITY |
|------------------------------------|--------------------|------|---|------|------------|
| R-77 | 109+00 TO 113+00 | LT. | CURB REMOVED | FT | 178 |
| R-78 | 111+83 TO 111+83 | LT. | PIPE REMOVED, 24" AND UNDER | FT | 23 |
| R-79 | 111+83 TO 112+05 | LT. | INLET REMOVED | EACH | 1 |
| R-80 | 111+49 TO 111+49 | RT. | SPECIAL - FILL AND PLUG EXISTING CONDUIT | FT | 55 |
| R-81 | 112+05 TO 112+05 | LT. | REMOVAL MISC: SANDSTONE CURB TO BE STORED | FT | 178 |
| TOTAL TO DEMOLITION SUMMARY | | | | | 178 |

| REF NO. | STATION TO STATION | SIDE | ITEM | UNIT | QUANTITY |
|---------------------------------------|--------------------|------|---|------|------------|
| R-74 | 105+00 TO 109+00 | RT. | WALK REMOVED | SF | 1290 |
| R-75 | 105+16 TO 105+16 | RT. | CURB REMOVED | FT | 118 |
| R-76 | 105+16 TO 109+00 | BOTH | PIPE REMOVED, 24" AND UNDER | FT | 34 |
| R-77 | 105+00 TO 109+00 | LT. | MANHOLE REMOVED | EACH | 1 |
| R-78 | 105+00 TO 109+00 | RT. | INLET REMOVED | EACH | 1 |
| R-79 | 105+00 TO 109+00 | LT. | REMOVAL MISC: SANDSTONE CURB TO BE STORED | FT | 124 |
| R-80 | 106+50 TO 106+50 | RT. | WALK REMOVED | SF | 2494 |
| R-81 | 106+73 TO 106+73 | RT. | WALK REMOVED | SF | 2479 |
| R-82 | 108+22 TO 108+22 | LT. | WALK REMOVED | SF | 8095 |
| R-83 | 108+74 TO 108+74 | RT. | WALK REMOVED | SF | 8095 |
| R-74 | 109+00 TO 113+00 | RT. | WALK REMOVED | SF | 2494 |
| R-75 | 109+00 TO 113+00 | RT. | WALK REMOVED | SF | 193 |
| R-76 | 109+00 TO 113+00 | LT. | WALK REMOVED | SF | 2479 |
| TOTAL TO DEMOLITION SUBSUMMARY | | | | | 435 |

